

pandora



PANDORA is an in-surface, near-flush power, data, and AV solution ideally suited for workspaces, education, and public spaces. PANDORA is quick to install, fitting neatly into a 128mm grommet hole, and can be closed when not in use. PANDORA provides 360° socket access when open.


Great looks, simple installation and a choice of international power sockets, our class leading 25W TUF USB charger, and data/AV* connectivity makes PANDORA perfectly suited to meeting tables, informal break out areas, and use in cafés and hotels .

TUF-R can be upgraded or replaced by anyone in less than five minutes using a simple tool. In the event of end user damage TUF-R is quick and simple to replace without the need for an electrician or turning off the power. PANDORA is moulded in either white (9003) or black PC/ABS for both excellent durability and appearance.



technical

Common Modular Components

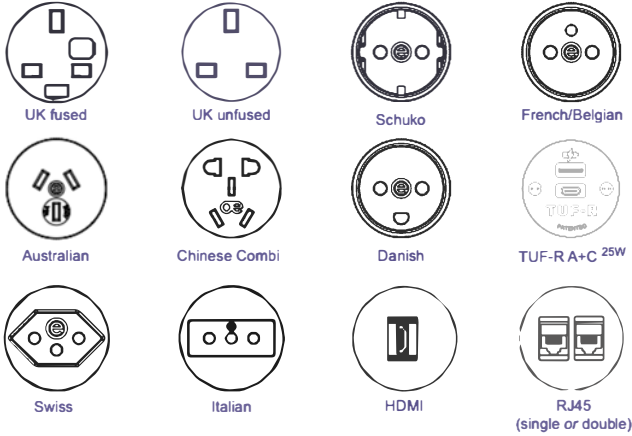

*We stock a variety of other configurations, please call for availability

Certifications

AC Power socket: Certified to the appropriate national/international standard eg: BS1363/5733, IEC60884-1, UL498, CCC, AS/NZS3112
 OE TUF 25W: Independently certified to IEC/UL 62368-1
 Wieland connectors - IEC 61535

CE Marking

All units built with UK and European socket types are CE marked by OE Electrics as complying with:
 Electromagnetic Compatibility Directive 2014/30/EU
 Low Voltage Equipment Directive 2014/35/EU
 RoHS2 Directive 2011/65/EU

Features

Configuration

PANDORA's three socket apertures can be configured with any combination of AC power sockets from the OE Elsafe 42mm international range and the class leading TUF25W USB charger.

Construction

Body and grommet - Fire retardant PC/ABS. Securing nut - Nylon 6.

Colour

White (9003) body with grey socket fascias, and optional colour inlays, or Black body with black socket fascias, and optional brushed stainless steel inlays

Fusing (to enable compliance to BS6396)

UK fused sockets are fitted with 5 x 20mm anti-surge ceramic fuses, with colour-coded fuse clips to denote the rating (3.15A/5A).

Power-cord options:

The PANDORA power cord may be hard-wired to a Wieland GST18 male connector, the appropriate mains AC plug for the socket type fitted, or an OE J Coupler for connecting two or more PANDORA units to a single mains supply socket.

Quality and testing

All PANDORA units are manufactured using ISO9001 quality controlled components and practices and are 100% tested before dispatch.

Visual: Configuration and appearance.

Mechanical: correct operation of rotating mechanism.
 Power sockets: Continuity, polarity, insulation & earth
 USB charger: Output voltage and resistance

