

# locking and safety clips


OE Elsafe stock a range of accessories to support your softwiring requirements. All of the accessories on offer are compatible with the Wieland GST18 soft wiring connector system.

Please view [video](#) for the correct installation method when connecting a QikFIT power module to a GST Coupler. The locking clip must “click” to be fully engaged and safe to use.

250004



250006



Product Number	Description
250004	WIELAND GST LOCKING CLIP

Product Number	Description
250006	WIELAND Safety End Cap Strip

# distributor blocks

150605



151595



150600



150602



Product Number	Description
150605	T - Connector 1 Male / 2 Female - Black
150606	T - Connector 1 Male / 2 Female - White
151595	GST18/3 DIST DB3 INLINE-CON - Black
151596	GST18/3 DIST DB3 INLINE-CON - White
150600	DISTRIBUTOR BLOCK 4 Way 1 Male / 3 Female - Black (DB4)
150601	DISTRIBUTOR BLOCK 4 Way 1 Male / 3 Female - White (DB4)
150602	DISTRIBUTOR BLOCK 6 Way 1 Male / 5 Female - Black (DB6)
150603	DISTRIBUTOR BLOCK 6 Way 1 Male / 5 Female - White (DB6)

## starter cable 10A, thermal overload

10A starter cables are fitted with a thermal overload for overload protection. One end is fitted with a 10A three pin plug and the other is fitted with a Wieland GST18 female connector.




Product Number	Description
150196	STARTER CABLE 2.0m 3PP to GST 1.5mm2 - Black
150195	STARTER CABLE 2.0m 3PP to GST 1.5mm2 - White

## interconnecting cables

All Wieland interconnecting cables are fitted with 20A Male and Female Wieland 18/3 series connectors which are fully compliant to AS/NZS61535.

Standard cables are available in either black or white and in lengths 300mm and 600mm and then 1M to 10M in 500mm increments. Other lengths are available upon request.

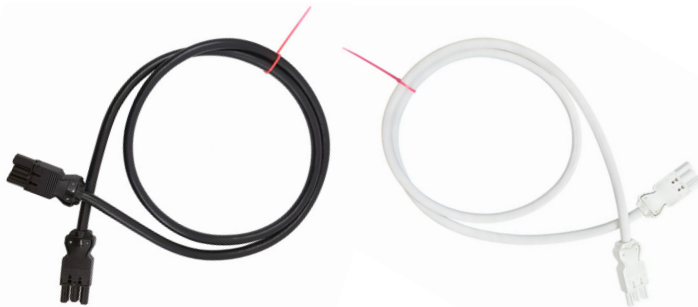

Product Number	Description
150492	IC CABLE 1500mm - Black Cabling / Black Connectors
150493	IC CABLE 1500mm - White Cabling / White Connectors
150494	IC CABLE 2000mm - Black Cabling / Black Connectors
150495	IC CABLE 2000mm - White Cabling / White Connectors
150496	IC CABLE 2500mm - Black Cabling / Black Connectors
150497	IC CABLE 2500mm - White Cabling / White Connectors

\*The termination of and connection to all starter sockets must be performed by a licensed electrician. Installation couplers must not be connected or disconnected under load.

Wieland GST18/3 connectors are compliant with Australian and New Zealand standards AS/NZS61535